



Finished Single Vision

DIAMETER	SPHERE	MINUS (-) CYLINDER								
		000	025	050	075	100	125	150	175	200
65mm	+025 to +400									
70mm	000 to -600									

Semi Finished Single Vision


Base Curves	0.50 (65); 2.00, 4.25, 5.75, 7.75 (70)
Power Range	+6.00 to -13.00 sph, cyl to -4.00

Semi Finished Bifocal

Flat Top 28

Diameter	70mm
Base Curves	2.00, 4.25*, 5.25, 6.25, 8.50
Additions	1.00D to 3.00D in 0.25D steps
Power Range	+7.00 to -8.00 sph, cyl to -4.00
Segment Size	28 mm
Segment Placement	5mm in, 5mm down

*Also available in thick blank.

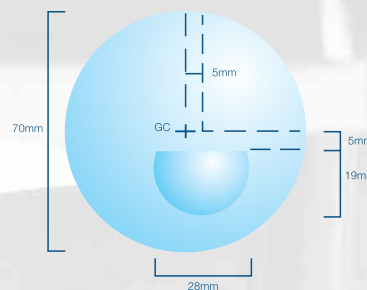

Progressive

	All Purpose F	Short Corridor M
Diameter	70/75mm Decentered 2.5mm	70/75mm Decentered 2.5mm
Base Curves	2.00, 4.25, 5.75 (75), 7.75 (70)	2.00, 4.25, 5.75 (75), 7.75 (70)
Additions	1.00D to 3.50D in 0.25D steps	1.00D to 3.50D in 0.25D steps
Power Range	+7.00 to -8.00 sph, cyl to -4.00	+7.00 to -7.00 sph, cyl to -4.00
Fitting Height	18mm	16mm
Width of Far Vision - 2mm above MRP	16.0mm	12.0mm
Minimum Width of Intermediate	7.0mm	7.5mm
Width of Near Zone - 14mm	11.5mm	15.0mm
Width of Near Zone - 20mm	15.2mm	19.5mm
Start of Progression above MRP	2.0mm	2.0mm
End of Progression below MRP	-14.0mm	-12.0mm
Length of Progression	16.0mm	14.0mm

